


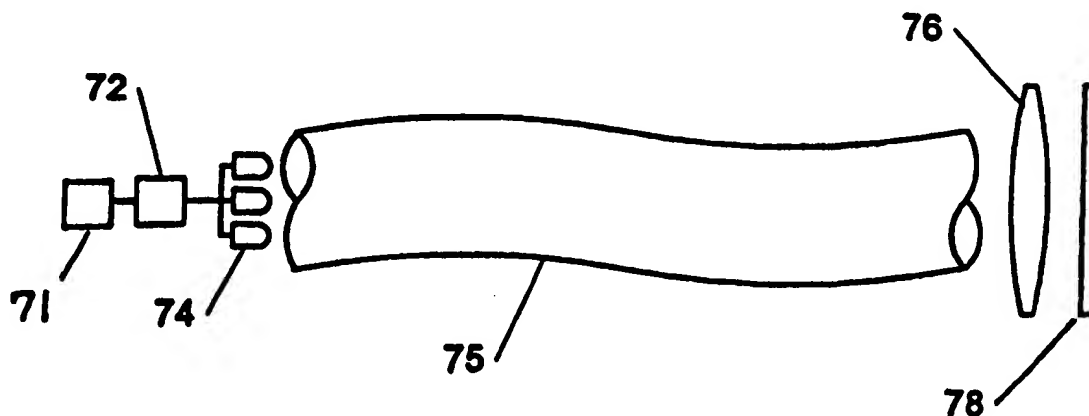

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> <b>G11B 7/14, 7/125</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/01858</b> <b>(43) International Publication Date:</b> 15 January 1998 (15.01.98)
<b>(21) International Application Number:</b> PCT/EP97/03606 <b>(22) International Filing Date:</b> 8 July 1997 (08.07.97) <b>(30) Priority Data:</b> 08/676,554      8 July 1996 (08.07.96)      US <b>(71) Applicant:</b> ZEN RESEARCH N.V. [NL/NL]; Van Engelenweg 21A, Curacao (AN). <b>(72) Inventors:</b> ALON, Amir; 837 Duncardine Way, Sunnyvale, CA 94087 (US). SHAPIRA, Shlomo; Degel Reuvan Street 27, 49551 Petach-Tikva (IL). <b>(74) Agent:</b> VOSSIUS & PARTNER; Sieberstrasse 4, D-81675 München (DE).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title:** APPARATUS AND METHODS FOR PROVIDING NON-COHERENT LASER ILLUMINATION FOR MULTI-TRACK READING APPARATUS

**(57) Abstract**

Methods and apparatus are provided for illuminating an optical disk in a multi-track optical disk reader. A laser beam is collimated and focused onto an area including multiple, adjacent data tracks on the optical disk. To minimize noise caused by interference resulting from the reflection of multiple beams from the optical disk, the coherency of the laser beam is reduced. This is accomplished by one or more of the following techniques: passing the laser beam through a multi-mode optical fiber, combining laser beams from multiple independent laser sources, and modulating the laser operating current at high frequency.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

APPARATUS AND METHODS FOR PROVIDING  
NON-COHERENT LASER ILLUMINATION  
FOR MULTI-TRACK READING APPARATUS

Field of the Invention

5                    This invention relates to methods and apparatus for reading multiple data tracks on an optical disk, and more particularly to methods and apparatus for providing wide area illumination in a multi-track optical disk reader.

Background of the Invention

10                    Optical disks have become widely used in part due to their relatively high storage capacity. Whereas a 3 ½ inch floppy disk can store 1.44 Mb (megabytes) of data, a 12 centimeter compact (optical) disk can store upwards of 650 Mb. Optical disks have therefore become increasingly popular for data storage for personal computer systems, and may be either read-only CD-ROMs, recordable

- 2 -

CD's, or multimedia disks, which combine music with multimedia content. Future developments promise to bring increased data storage capacity and faster access times to optical disk technology, increasing its value as a data storage media, such as the proposed Digital Video Disk format (DVD).

5                   A CD generally includes a transparent plastic substrate having data encoded in pits that are impressed into the surface of the substrate along spiral or concentric data tracks. A metalization layer deposited on the pitted substrate provides a reflective surface, and a protective transparent layer is then deposited on the metalization layer. To read the data, light is reflected off of the metalization  
10 layer and sensed by a detector in an optical pickup assembly of the optical disk reader.

                  As the disk is rotated, pits along a data track sequentially pass under an illumination source. The presence of a pit in the data track causes destructive interference to occur between light reflecting from the pit and light reflecting from  
15 the area surrounding the pit. The intensity of the reflected light is thus modulated by the pattern of data pits in the disk substrate.

                  The modulated, reflected light is directed to a detector that develops electronic signals corresponding to the intensity of the reflected light. These electronic signals are then demodulated by processing circuitry to recover the digital  
20 information stored on the optical disk. Further details regarding the construction and use of optical disks can be found in Compact Disc Technology, Nakajima, H. and Ogawa, H., translated by Aschmann, C., published by Ohmsha, Ltd., Japan (1992), and The Compact Disc Handbook, Pohlmann, K., 2nd ed., A-R Editions, 1992.

25                   The increased availability of CD-ROM products, coupled with the availability of increasingly faster microprocessors, has created a need for ever faster optical disk drives. As a result, disk drives capable of operating at speeds higher than that of a standard speed drive are becoming available. For example, drives

- 3 -

having a spindle speed up to ten times (10X) the spindle speed of a standard drive are now available.

Previously known techniques for designing such high speed optical disk drives relied on increasing the rotational speed of the optical disk to reduce latency and increase data transfer rates. For example, in an 8X disk drive, the disk is rotated at speeds up to 4800 rpm when reading the innermost data track, compared to approximately 600 rpm in a standard speed drive. However, the ability to achieve even greater speeds may soon be limited by the ability of such technology to continue to provide low-cost, easily manufacturable systems, since the use of greater disk rotational speeds requires more sophisticated designs using tighter tolerances than employed in previously known arrangements.

An alternative to simply increasing the disk rotational speed is to read multiple data tracks simultaneously, as described in commonly assigned U.S. Patent No. 5,426,623, the entirety of which is incorporated herein by this reference. In accordance with the methods and apparatus provided therein, for example, ten adjacent data tracks may be read simultaneously, resulting in a tenfold increase in the rate of reading data from an optical disk. Thus, even if the disk is rotated at only twice standard speed (i.e., a 2X drive is used), the capability to read ten tracks provides the equivalent of a 20X drive.

However, implementing an optical disk reader with the capability to read multiple data tracks simultaneously presents new design challenges. In previously known optical disk readers, a laser beam is focused onto a single track of the reflective, data bearing layer of an optical disk. The light reflected from that layer is then imaged onto a detector element using suitable optics. When it is desired to read multiple adjacent tracks of an optical disk, however, light beams reflected from the multiple adjacent tracks may destructively interfere with one another due to the coherent nature of the incident laser beam. Consequently, a single coherent laser source cannot be used alone to image multiple adjacent data tracks. By contrast, previously known non-coherent light sources, such as

- 4 -

incandescent light sources, cannot provide the illumination intensity required to provide suitable imaging from the reflective surface of an optical disk.

In view of the foregoing, it would be desirable to provide methods and apparatus for illuminating an optical recording medium to enable reading of multiple tracks of the recording medium with a laser source, so that the reflected beams are of sufficient intensity to provide adequate signal strength to the optical detector.

It would further be desirable to provide apparatus and methods for reducing the temporal and spatial coherence of a laser source to provide an illumination source suitable for reading multiple adjacent tracks of an optical disk.

#### Summary of the Invention

It is a therefore an object of the present invention to provide methods and apparatus for illuminating an optical recording medium to enable reading of multiple tracks of the recording medium with a laser source, so that the reflected beams are of sufficient intensity to provide adequate signal strength to the optical detector.

It is a further an object of the present invention to provide effective illumination of multiple data tracks of an optical disk in a multiple track optical disk reader that reduces the effects of interference due to the high coherency of previously known laser sources.

In accordance with these and other objects of the present invention, methods and apparatus are disclosed for reducing temporal (phase) and spatial coherency of a laser beam used to illuminate the surface of an optical disk. Specifically, optical fibers, arrays of lasers, and high frequency modulation techniques may be employed to reduce temporal coherence of the illumination thereby reducing the strength and stability of any diffraction induced interference.

- 5 -

### Brief Description of the Drawings

The above and other objects of the invention, its nature and various advantages, will be apparent upon consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which like  
5 reference characters refer to like parts throughout, and in which:

FIG. 1 is a schematic representation of an optical system of a prior art optical disk reader;

FIG. 2 illustrates the effect of reflecting a sharply focused laser beam from the data-bearing surface of an optical disk using the prior art optical system of  
10 FIG. 1;

FIG. 3 illustrates the effect of illuminating multiple data tracks with a single laser beam;

FIGS. 4A and 4B depict the effects of passing light rays through stepped-index and graded-index multi-mode optical fibers, respectively, in  
15 accordance with the present invention;

FIG. 5 illustrates the effect of providing wide area illumination using multiple laser sources in accordance with an alternative embodiment of the present invention;

FIG. 6 shows the effect of modulating a laser source at a high  
20 frequency in accordance with a further embodiment of the present invention; and

FIG. 7 is an illustrative embodiment of a wide area illumination source in accordance with the principles of the present invention.

### Detailed Description of the Invention

Referring first to FIG. 1, a schematic representation of the optical  
25 components of a previously known optical disk reader are described. Laser diode 12 is connected to current source 11 that excites laser diode 12 to emit a beam of light (represented by rays 13a and 13b), which is collimated by lens 14 before passing through beam splitter 15. The laser beam is then focused into a small spot

- 6 -

on the surface of optical disk 17 by lens 16. Incident light reflected by optical disk 17 is redirected to optical sensor 19 by beam splitter 15 and lens 18, where it is converted to an electrical signal for further processing by the optical disk reader.

As depicted in FIG. 2, incident light is reflected from the reflective surface of optical disk 17 to produce multiple reflected beams 26. For example, illuminating laser beam 22 is focused so that it falls on pits in data track 24 as well as on inter-track lands 25a and 25b adjacent to data track 24. Reflected beams 26 within the angle subtended by lens 16 are directed by the optical system to the optical sensor 19, where they are sensed to generate suitable electronic signals, as is well known in the art.

If scaled for use in reading multiple adjacent tracks of optical disk 17, laser beam 22 could be arranged to cover numerous data tracks on the optical disk, as shown in FIG. 3. In this instance, however, multiple reflected beams 26 generated by the data in adjacent data tracks 24a-c and inter-track lands 25a-d would destructively interfere, as depicted by reflected beams 32. This interference, which results from the highly coherent nature of previously known laser illumination sources and may render the resulting signal imaged onto the optical sensor excessively noisy or even useless.

In addition, because an optical disk reader is a mechanical system, there is invariably some vibration introduced into the system. For example, a tracking servo-mechanism may cause some vibration in the optical system components. Similarly, a small dust particle or warp in the surface of optical disk 17, and the attendant movement of lens 16 to maintain focus, may also cause changes in light ray path lengths. Referring back to FIG. 1, the path lengths of light rays 13a and 13b may, therefore, vary, causing relative phase shifts to light rays 13a and 13b causing the interference pattern to shift about relative to optical sensor 19. Because the shifting patterns fall on optical sensor 19, they hinder detection of track data signals, appearing as excess noise in the output of optical sensor 19.



- 7 -

Thus, in accordance with the principles of the present invention, various methods and apparatus are employed to reduce the phase coherency of previously known laser illumination sources, thus making use of such lasers practicable in multi-track optical disk readers. In a first embodiment of the present invention the laser beam is passed through a multi-mode optical fiber, as shown in FIGS. 4A and 4B. Optical fiber 42 is a stepped-index optical fiber in which there is a discontinuity in the refractive index of the optical fiber between cladding 42 and core 43. The sudden change in refractive index causes light beams to be internally reflected at the boundary between the two. Optical fiber 46, in contrast, has a refractive index that varies radially, causing light rays to be gradually refracted back toward the center of optical fiber 46.

In multi-mode optical fibers 42 and 46 different light beams may travel different paths through the optical fiber. Thus, for example, stepped-index optical fiber 42 provides multiple paths for light rays 44a-c to travel through the fiber, and optical fiber 46 provides multiple paths for light rays 48a-c. The light rays are in phase when they are emitted by laser diode 12; however, because the light rays travel different paths the rays are no longer in phase when they exit optical fiber 42 and 46. Thus, the exiting light will exhibit numerous phase shifts over time, or phase jitter. This effectively reduces the stability of any interference patterns created by the wide area illumination.

In accordance with a second embodiment of the present invention, phase coherency may also be reduced by combining the output of multiple laser diodes to provide illumination of an optical disk. The phase coherency of a laser beam is related to the fact that all of the light rays within the beam were emitted by the same device. Light emitted from separate laser devices may not be in phase with each other. This is illustrated in FIG. 5, wherein three laser diodes 12a-c are provided emitting light waves 52a-c, respectively. Since laser diodes 12a-c are independent of one another, their outputs are independent of one another and may not be in phase. Thus, laser beams 52a-c may be combined to create a non-

- 8 -

coherent, high intensity, source of illumination. As discussed above, reducing phase coherency in wide area illumination weakens interference patterns and thereby reduces interference-based noise.

Referring now to FIG. 6, yet another embodiment of the present invention is described in which single laser 12 may be used by operating the laser in multiple modes. A typical laser diode begins to emit light when a certain threshold current is exceeded. As the current through the laser diode increases above the threshold, the device passes through various operating modes. In some modes, the laser diode may emit light at numerous, closely spaced frequencies, whereas in other modes the diode may emit light predominately at a single frequency. Furthermore, light emitted in one mode is likely to be out of phase with light emitted in another mode.

Thus, in accordance with the principles of the present invention, current provided by current source 11 to laser diode 12 is modulated by circuitry 60 so that the laser diode is continually switched on and off. Circuitry 60 may comprise any suitable switching circuitry suitable capable of operating at high frequency. The laser diode current is preferably modulated at a high frequency, for example, greater than 100 MHZ, such as at 500 MHZ, so that the laser diode is prevented from operating in any single mode for a significant period of time. As a result of the high frequency modulation, the light emitted by laser diode 12 has reduced temporal coherency.

With respect to FIG. 7, in still another embodiment of the present invention, the aforementioned embodiments are combined in various configurations. For example, in FIG. 7, each of the previous embodiments are used. Thus, high frequency modulator 72 may modulate drive current from current source 71 to the laser diodes of diode array 74. Furthermore, laser beams emitted by laser diode array 74 passed through optical fiber 75 to further reduce phase coherency. Finally, light exiting optical fiber 75 is collimated and focused onto an optical disk.

- 9 -

In addition, holographic beam shaping element 78 is provided to improve the energy profile of the illuminating beam. A typical laser beam has a Gaussian energy profile—i.e. more energy near the center of the beam than near its periphery. Such an uneven energy distribution may result in data tracks near the center of the illuminated area being more strongly illuminated than data tracks away from the center of the beam. Thus, less energy may be present in beams reflected from the distant tracks, effectively reducing the signal strength of those beams. To compensate, holographic beam shaping element 78 may be added to the optical system to provide a more uniform, or “top hat”, energy distribution across the laser beam.

One skilled in the art will thus appreciate that the present invention may be practiced by other than the disclosed embodiments, which are presented for purposes of illustration and not of limitation, and the present invention is limited only by the claims which follow.

- 10 -

What is claimed is:

1. Apparatus for illuminating multiple adjacent data tracks of an optical disk, the apparatus comprising:  
a first laser diode generating a first laser beam;  
circuitry for providing a first operating current to the first laser diode; and  
means for reducing coherence in the first laser beam.
2. The apparatus as defined in claim 1 wherein the means for reducing coherence comprises a multi-mode optical fiber optically coupled to the first laser diode so that the first laser beam passes through the multi-mode optical fiber.
3. The apparatus as defined in claim 2 further comprising circuitry for modulating the first operating current at high frequencies.
4. The apparatus as defined in claim 2 further comprising:  
at least a second laser diode generating a second laser beam and  
circuitry for providing a second operating current to the at least second laser diode,  
the at least second laser diode optically coupled to the multi-mode optical fiber so  
that the second laser beam passes through the multi-mode optical fiber.
5. The apparatus as defined in claim 4 further comprising circuitry for modulating the first and second operating currents at high frequencies.
6. The apparatus as defined in claim 1 wherein the means for reducing coherency comprises circuitry for modulating the first operating current at high frequency.

- 11 -

7. The apparatus as defined in claim 6 wherein the circuitry for modulating the first operating current modulates the first operating current at frequencies in a range greater than 100 MHZ.

8. The apparatus as defined in claim 6 further comprising:  
at least a second laser diode and circuitry for providing an operating current to the at least second laser diode, wherein the second operating current is modulated at high frequency.

9. The apparatus as defined in claim 8 wherein the first operating current and the second operating current are modulated at frequencies in a range greater than 100 MHZ.

10. The apparatus as defined in claim 1 wherein the means for reducing coherency comprises:  
at least a second laser diode generating a second laser beam; and  
an optical component for combining the first and second laser beams.

11. The apparatus as defined in claim 10 wherein the optical component for combining the first and second laser beams comprises a multi-mode optical fiber.

12. The apparatus as defined in claim 10 further comprising a multi-mode optical fiber.

- 12 -

13. A method for illuminating multiple data tracks of an optical disk, the method comprising:

providing a first laser to produce a first laser beam;  
passing the first laser beam through a multi-mode optical fiber; and  
directing the output of the multi-mode optical fiber at a surface of the optical disk.

14. The method as defined in claim 13 further comprising  
modulating an operating current of the first laser at high frequencies.

15. The method as defined in claim 13 further comprising:  
providing at least a second laser for producing a second laser beam;  
and  
passing the second laser beam through the multi-mode optical fiber.

16. The method as defined in claim 15 further comprising  
modulating an operating current of the first and the at least second laser at high frequency.

17. A method for illuminating multiple data tracks of an optical disk, the method comprising:

providing a first laser to produce a first laser beam;  
directing the first laser beam at a surface of the optical disk; and  
modulating an operating current of the first laser at high frequency.

18. The method as defined in claim 17 further comprising passing the first laser beam through a multi-mode optical fiber.

- 13 -

19. The method as defined in claim 17 further comprising:  
providing at least a second laser to produce a second laser beam;  
combining the first and second laser beams; and  
modulating an operating current for the at least second laser at high  
frequency.

20. The method as defined in claim 19 further comprising passing  
the first and second laser beams through a multi-mode optical fiber.

1/5



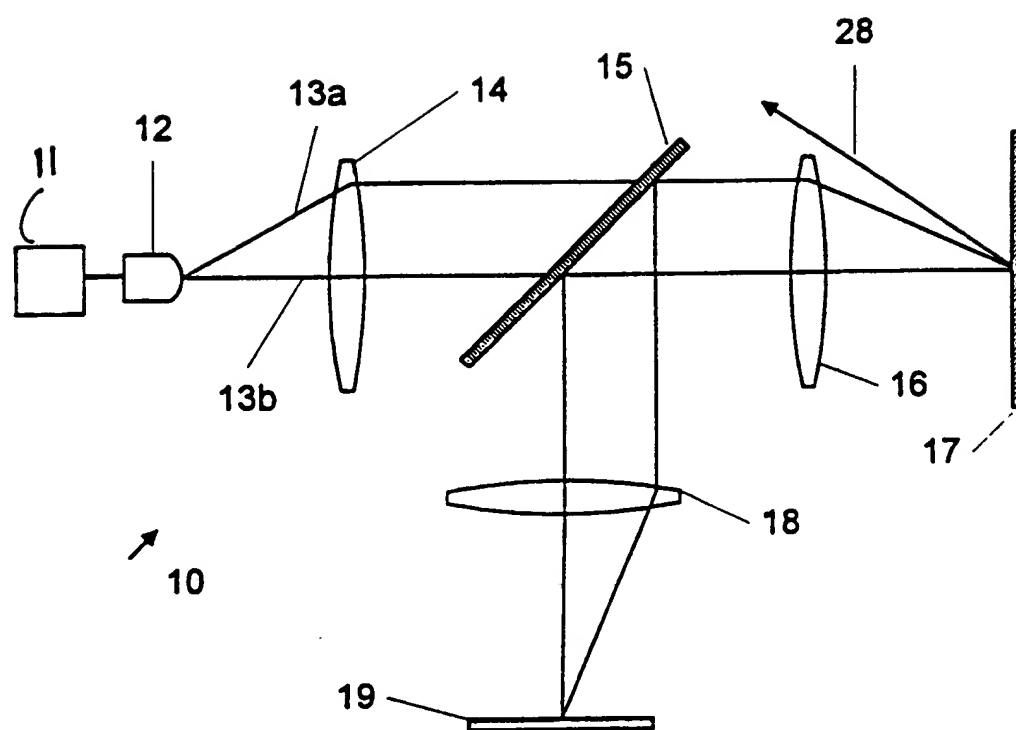


FIG. 1

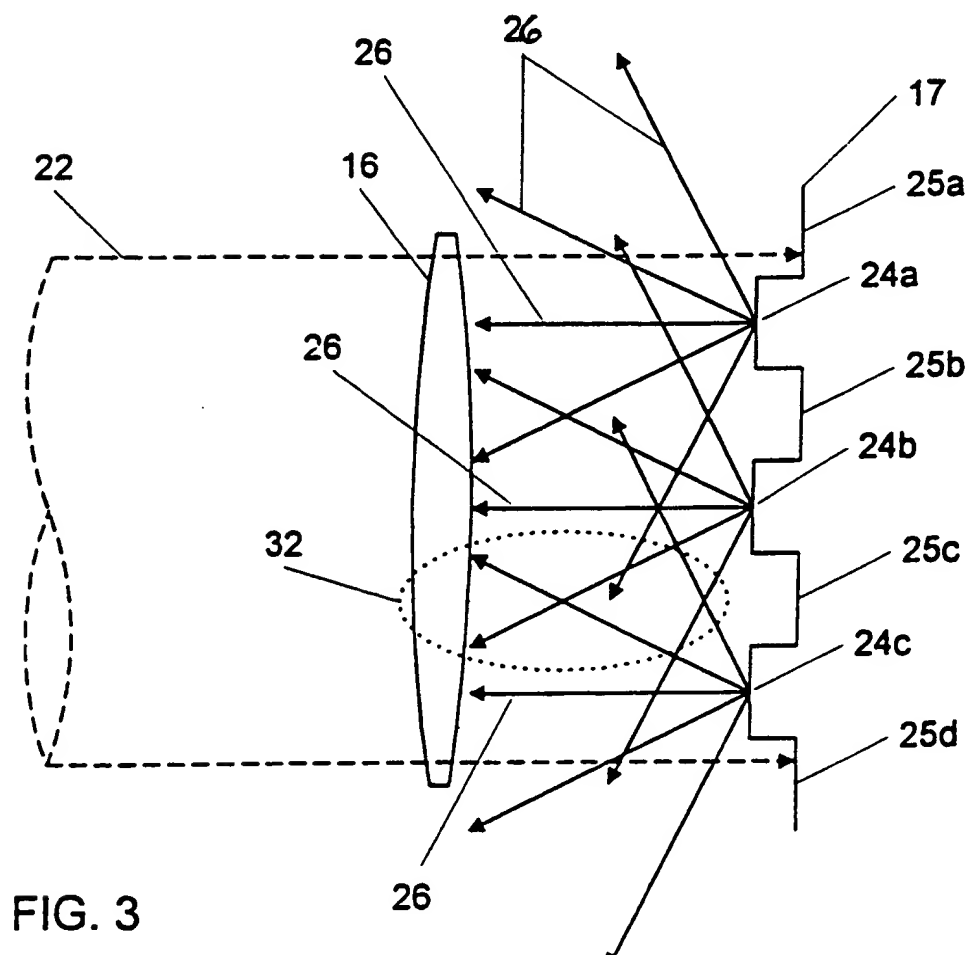

2/5

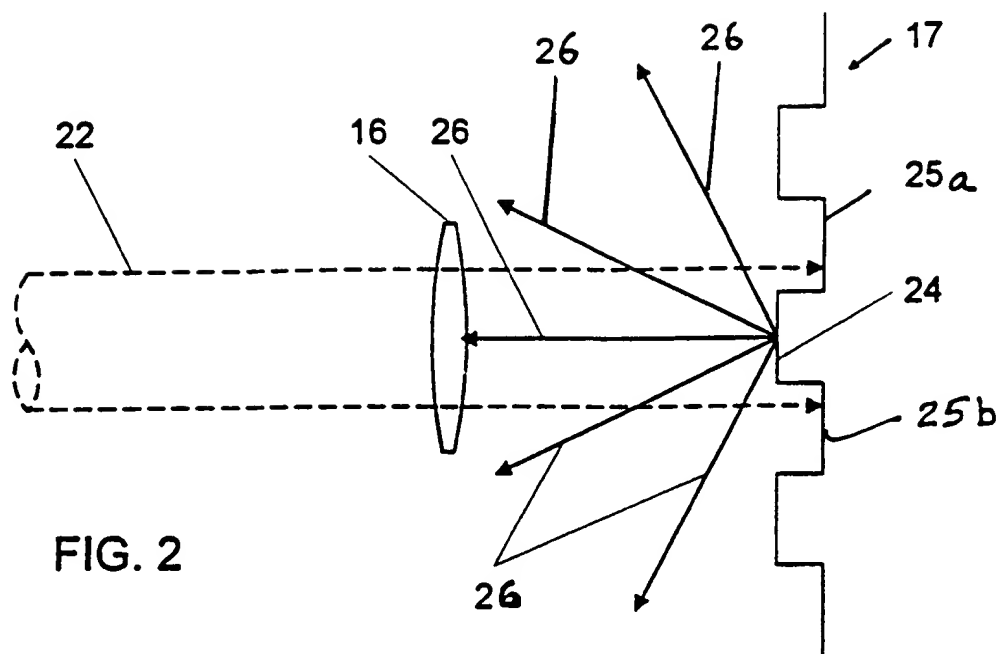

3/5

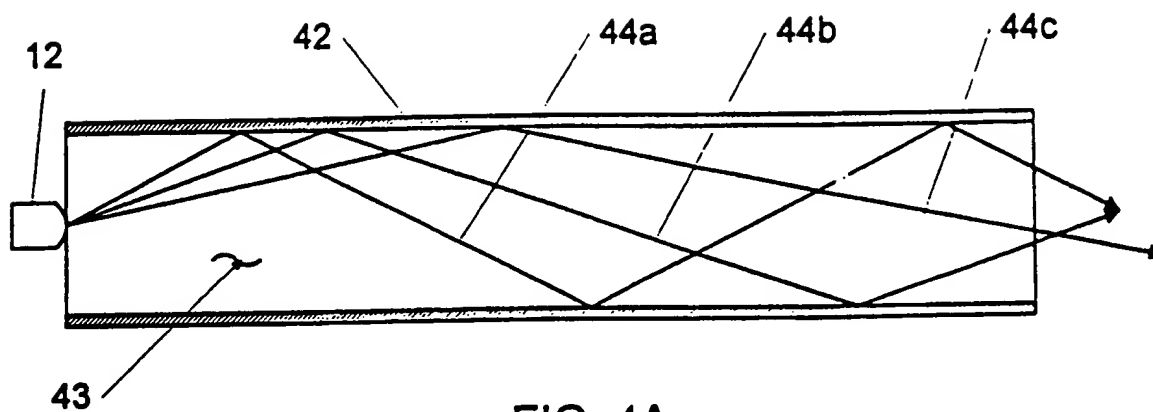


FIG. 4A

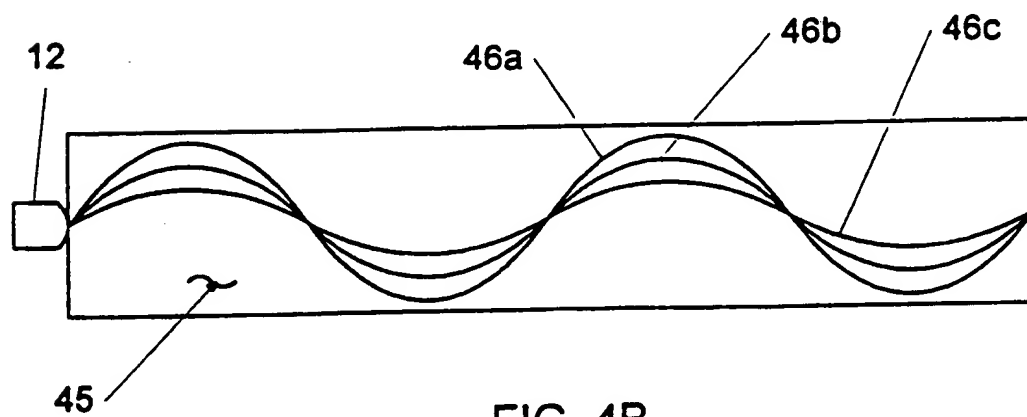


FIG. 4B

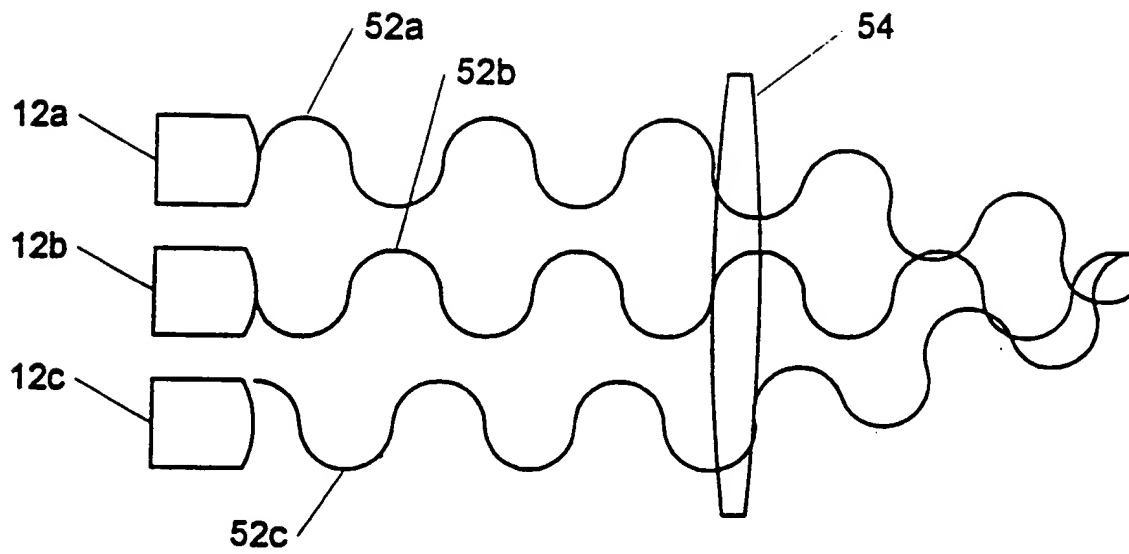


FIG. 5

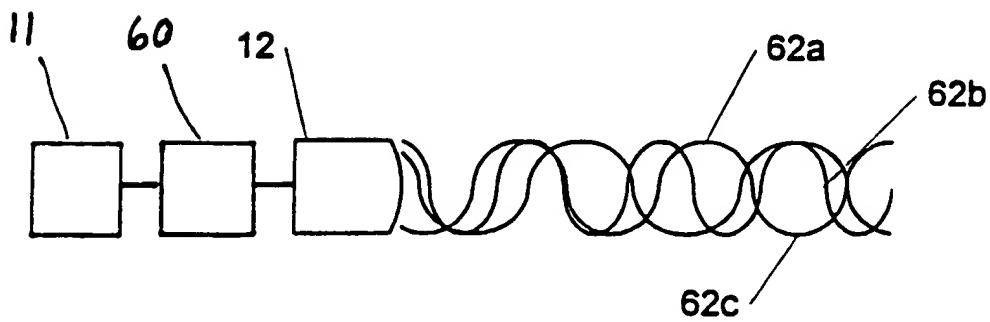


FIG. 6

5/5

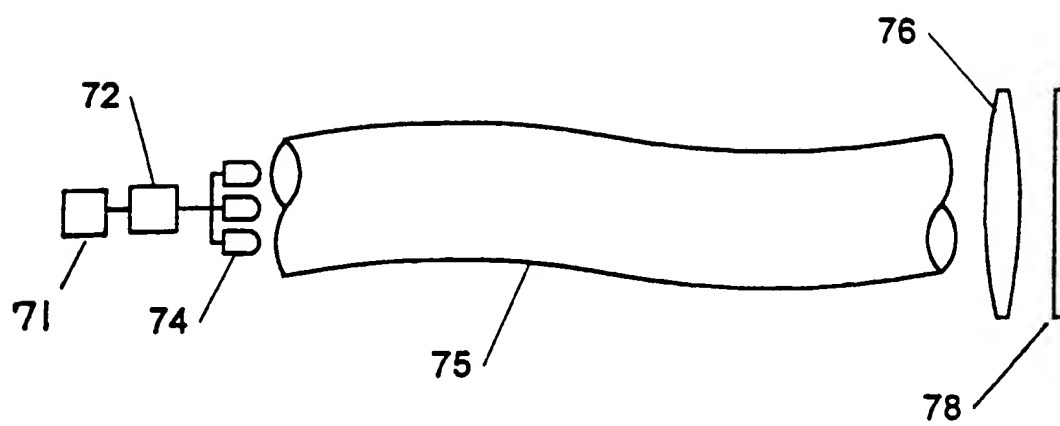


FIG. 7

# INTERNATIONAL SEARCH REPORT

Internatio. Application No  
PCT/EP 97/03606

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 G11B7/14 G11B7/125

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 471 455 A (JABR) 28 November 1995	1,6,10, 13-15, 17,19
Y	see column 5, line 43-49; claim 1	1,13,17
Y	--- WO 94 09492 A (SONY CORP.) 28 April 1994 see page 11, last paragraph see page 12, paragraph 1 see page 18, paragraph 1 see figures 1,2,6 see page 15, last paragraph --- -/--	1,13,17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

14 November 1997

Date of mailing of the international search report

02.12.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk

Authorized officer

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 97/03606

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 581 529 A (EUGENE I GORDON) 8 April 1986  see column 3, line 14-20 see column 4, line 19-48; claims 1,4,11; figures 1,2,4 ---	1,6,10, 13-15, 17,19
X	US 5 081 617 A (DANIEL GELBART) 14 January 1992  see column 1, line 22-27 see column 2, line 28-44; claim 1; figure 1 ---	1,6,13, 14,17
X	EP 0 588 575 A (CANON KK) 23 March 1994  see column 3, line 30-35 see column 26, line 56 - column 27, line 5; claim 1; figure 41 ---	1-6,8, 10-20
A	WO 93 04390 A (EASTMAN KODAK CO) 4 March 1993  see page 2, line 19-35; claims 1-6; figures 8,9 ---	1,2, 10-19
A	PATENT ABSTRACTS OF JAPAN vol. 008, no. 101 (P-273), 12 May 1984 & JP 59 011548 A (HITACHI SEISAKUSHO KK), 21 January 1984, see abstract ---	4,10,15, 19
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 606 (P-1827), 17 November 1994 & JP 06 223399 A (SEIKO EPSON CORP), 12 August 1994, see abstract ---	3,14
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 253 (P-395), 11 October 1985 & JP 60 103531 A (HITACHI SEISAKUSHO KK), 7 June 1985, see abstract ---	1,13,17
A	PATENT ABSTRACTS OF JAPAN vol. 012, no. 185 (P-710), 31 May 1988 & JP 62 293527 A (MATSUSHITA ELECTRIC IND CO LTD), 21 December 1987, see abstract ---	1,13,17
A	PATENT ABSTRACTS OF JAPAN vol. 013, no. 019 (P-814), 18 January 1989 & JP 63 223710 A (MASAYUKI IZUTSU;OTHERS: 03), 19 September 1988, see abstract ---	1,13,17

# INTERNATIONAL SEARCH REPORT

Internatio. Application No

PCT/EP 97/03606

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>PATENT ABSTRACTS OF JAPAN  vol. 010, no. 089 (P-444), 8 April 1986  &amp; JP 60 224134 A (YOKOKAWA HOKUSHIN DENKI  KK), 8 November 1985,  see abstract  -----</p>	<p>1,3,13,  17</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internatio. Application No

PCT/EP 97/03606

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5471455 A	28-11-95	US 5638355 A	10-06-97
WO 9409492 A	28-04-94	JP 6131686 A	13-05-94
		AU 665873 B	18-01-96
		AU 5157193 A	09-05-94
		CN 1090414 A	03-08-94
		EP 0617830 A	05-10-94
		US 5523996 A	04-06-96
US 4581529 A	08-04-86	NONE	
US 5081617 A	14-01-92	NONE	
EP 588575 A	23-03-94	JP 6096468 A	08-04-94
		US 5608716 A	04-03-97
WO 9304390 A	04-03-93	US 5248992 A	28-09-93